FlushT@ch

Flush Valve

Chrome-Plated Metal Casting Cover

Operates on AA Alkaline Batteries

Latching Solenoid Operator

Manual Mechanical Override Button: allows user to flush the valve during a power outage

Operating Pressure: 15 to 100 PSI

Easy Installation and Maintenance

Retrofits for Royal, Regal (Sloan) and Z6000 (Zurn) Manual Flush Valve Infrared Sensor:
Accurate, stable performance,
even in the sunlight or any light.
Adjustable sensor range: 15~32 inch.

Adjustable Flush Volume Urinal: 0.25/0.5/1.0/1.5GPF Closet: 1.28/1.6/2.4GPF

> Interchangeable from Closet to Urinal Valve





Light Flush(1.1 GPF): if user is in detection zone for 60 seconds or less

Standard Flush(1.6 GPF): if user is in detection zone for more than 60 seconds



self-cleaning mechanism, prevents clogging,

reduces maintenance

and ensures stable flow

Diaphragm Type:

Casing Material	Chrome Plated
Power Supply	4 AA Alkaline Batteries
Power Consumption	3W or less
Battery Life	3 Years(Based on 3,000 cycles per month)
Sensing Distance	Adjustable 15 ~ 32 inch
Minimum Detection Time	5 Seconds
Flush Delay Time	3 Seconds
Operating Pressure	15 ~ 100 PSI
Flush Volume	Adjustable 1.28 / 1.6 / 2.4 GPF
Sanitary Flush	Flushes after every 24 hours of non-use

Retrofit Kit for Urinal Flush Valve

Casing Material	Chrome Plated
Power Supply	4 AA Alkaline Batteries
Power Consumption	3W or less
Battery Life	3 Years(Based on 3,000 cycles per month)
Sensing Distance	Adjustable 15 ~ 32 inch
Minimum Detection Time	5 Seconds
Flush Delay Time	1 Second
Operating Pressure	15 ~ 100 PSI
Flush Volume	Adjustable 0.25 / 0.5 / 1.0 / 1.5 GPF
Sanitary Flush	Flushes after every 24 hours of non-use

Flush Valve Retrofit Kit

CF112CF112S CF112Z




CF1125: Retrofits for Royal, Regal(Sloan)

Manual Flush Valve

CF112Z: Retrofits for Z6000(Zurn)

Manual Flush Valve

- Convert manual flush valve into automatic
- Work with most manual flush valves
- Dual flush: water efficiency, greatly reduce water consumption
- One model fits all: urinal and water closet interchangeable, never worry about overstock
- 2 year warranty
- Patent No. : US D751,182S

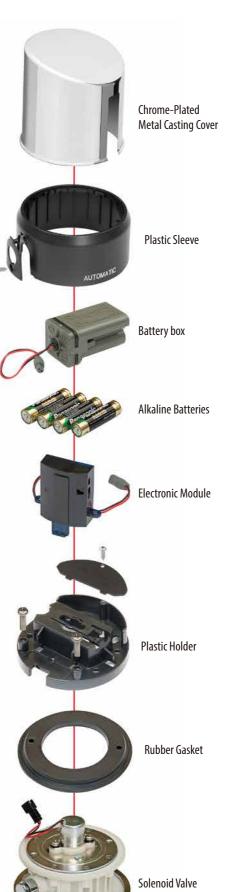



www.flushtech.com